


LOAD CHART

Working Radius		4.60	6.10	9.14	12.19	15.24	18.29	21.34	24.38	27.43	Meters
B O O M L E N G T H	30.0 M	-	7272	6818	6363	6363	5909	5454	5272	5176	Kg.
	27.5 M	10000	9090	9090	8182	7727	7272	7272	6363	-	Kg.
	24.9 M	12272	11818	11363	10909	10454	10000	9090	-	-	Kg.
	22.4 M	14545	14545	14545	13636	12727	10909	10000	-	-	Kg.
	19.8 M	15454	15454	15454	14545	14545	11363	-	-	-	Kg.


* Minimum Working Radius 3.2 M

A	Maximum Uplift 163.25 KN Maximum Download 524.89 KN	Max Shear Load .079 KN
B	Maximum Lift 278 KN Maximum Download 246.88 KN	
D	Maximum Adjustment 1'5" Must Base Sheave Position 360 deg. Maximum Swing 240 deg.	

Component weight kilograms	
1	151 KG
2	132 KG
3	399 KG
4	147 KG
5	147 KG
6	184 KG
7	147 KG
8	209 KG
9	154 KG
10	386 KG
11	318 KG
12	242 KG
13	123 KG
14	84 KG
15	9 KG
16	225 KG
17	68 KG

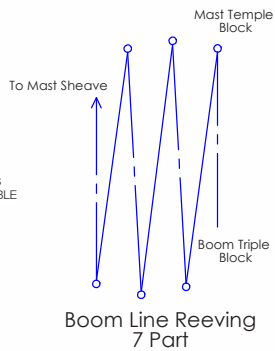

Note:
All Boom Lengths
Require 16MM CABLE

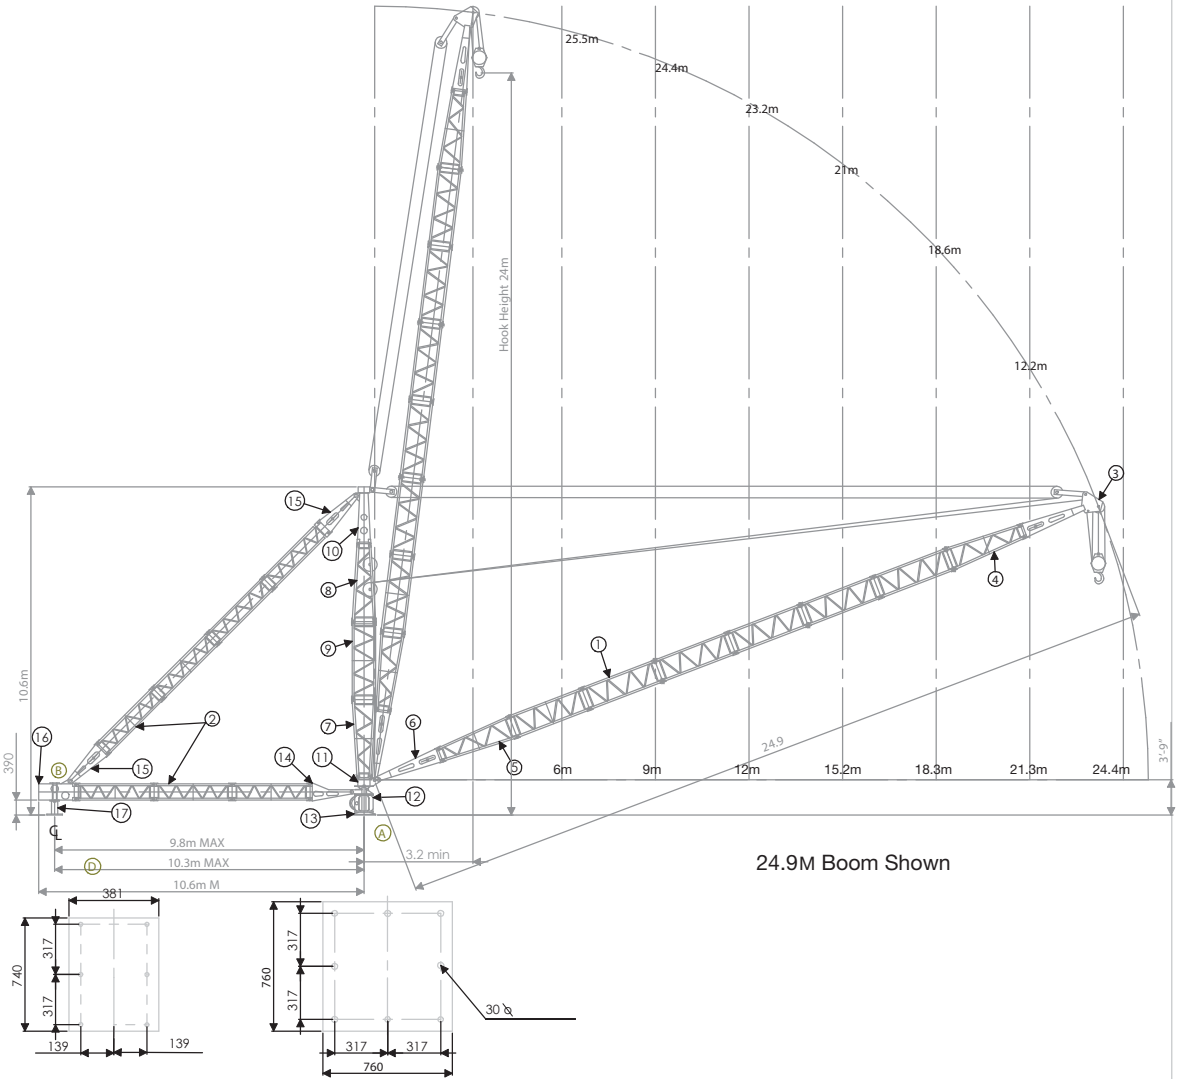

OPERATEING SPEED

HOIST - 120 m/Min
LUFF - 85°/ 20°, 1 Min
SLEW - .7 RPM

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SELECT CRANS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SELECT CRANES IS PROHIBITED.

SELECT CRANESTM
AND RIGGING

STIFF LEG DERICK Model SLD 30-15